

[illegible][illegible]

ILLUSTRATED PARTS BREAKDOWN

SA600 STORAGE ARRAY

HOW TO USE THE IPB

GENERAL

This IPB is compiled following the organization and nomenclature of the engineering drawing structure.

MAJOR ASSEMBLY LOCATOR (When Applicable)

The Major Assembly Locator (first illustration) is an index that provides a description and a figure reference for all illustrations used in this manual.

INDENTED PARTS LIST

This manual identifies each assembly being broken down (figure reference callout) and all parts of that assembly. Further breakdown of an assembly is shown by an asterisk (*) preceding the item callouts in the Description Column. The number of asterisks preceding an item is used to denote the subordination of that item with respect to the Major Assembly. A single asterisk preceding an item description indicates that the item is part of the major assembly being illustrated. Items that are subordinate to single asterisk items are denoted by two asterisks (**) and immediately follow the related single asterisk item. This system of part identification provides a means for the user to identify the next higher assembly item and make alternate selections for parts when the required replacement part of assembly is not immediately available.

COLUMN CALLOUT DESCRIPTION

Figure and Item - indicates the figure number and item number of each part.

Description - Lists the name of the part and pertinent specifications (when required). Asterisks preceding the description denote the subordination of the part to the next higher assembly.

DEC Part No. - Lists the Digital part ordering number. A blank in this column indicates a Digital part number was not assigned at the time of publication.

ECO Cut-In - The notation at the top of this column indicates the ECO level of the system (option) at which the PB was initially prepared. Subsequent ECO level designations that modify existing parts or add new parts to the device are inserted in the ECO Cut-In column next to the part that is added or modified.

Used On Code - Letters in this column correspond to the variation codes assigned in Figure 1. Parts with an Alpha notation(s) are used only in those option variations. A blank indicates that the part is used on all option variations.

Ref Fig No. - A cross reference between illustrations. For each Major Assembly, the number in this column denotes the figure of the next higher assembly. For all subassemblies, the number in this column denotes the figure showing additional detailed breakdown.

PART NUMBER PART DESCRIPTION SORT SECTION

Parts are sorted both numerically and alphabetically by description, referenced to a location within the IPB by figure number and item number.

REVISION HISTORY				OTHER PB MANUALS REFERENCED
PRINTING	ECO LEVEL		DATE	
1st Printing	SA600-X	00002-00004	31-AUG-89	EK-ORA90-P
	70-24444	00002-00004		
	70-24442	00002-00004		

Digital Equipment Corporation reserves the right, without notice, to make substitutions and modifications in the specifications of products documented in this manual and further reserves the right to withdraw any of these products from the market without notice.

Digital Equipment Corporation is not responsible for errors which may appear in the technical description (including illustrations and photographs) of the products covered by this manual.

None of the descriptions contained in this manual imply the granting of any license whatsoever to make, use or sell equipment constructed in accordance therewith.


Copyright © 1989 by Digital Equipment Corporation. All rights reserved.

The postage-paid READER'S COMMENTS form on the last page of this document requests your critical evaluation to assist us in preparing future documentation.

The following are trademarks of Digital Equipment Corporation :




DEC
DECUS
PDP
RA90
SA600
UNIBUS
VAX

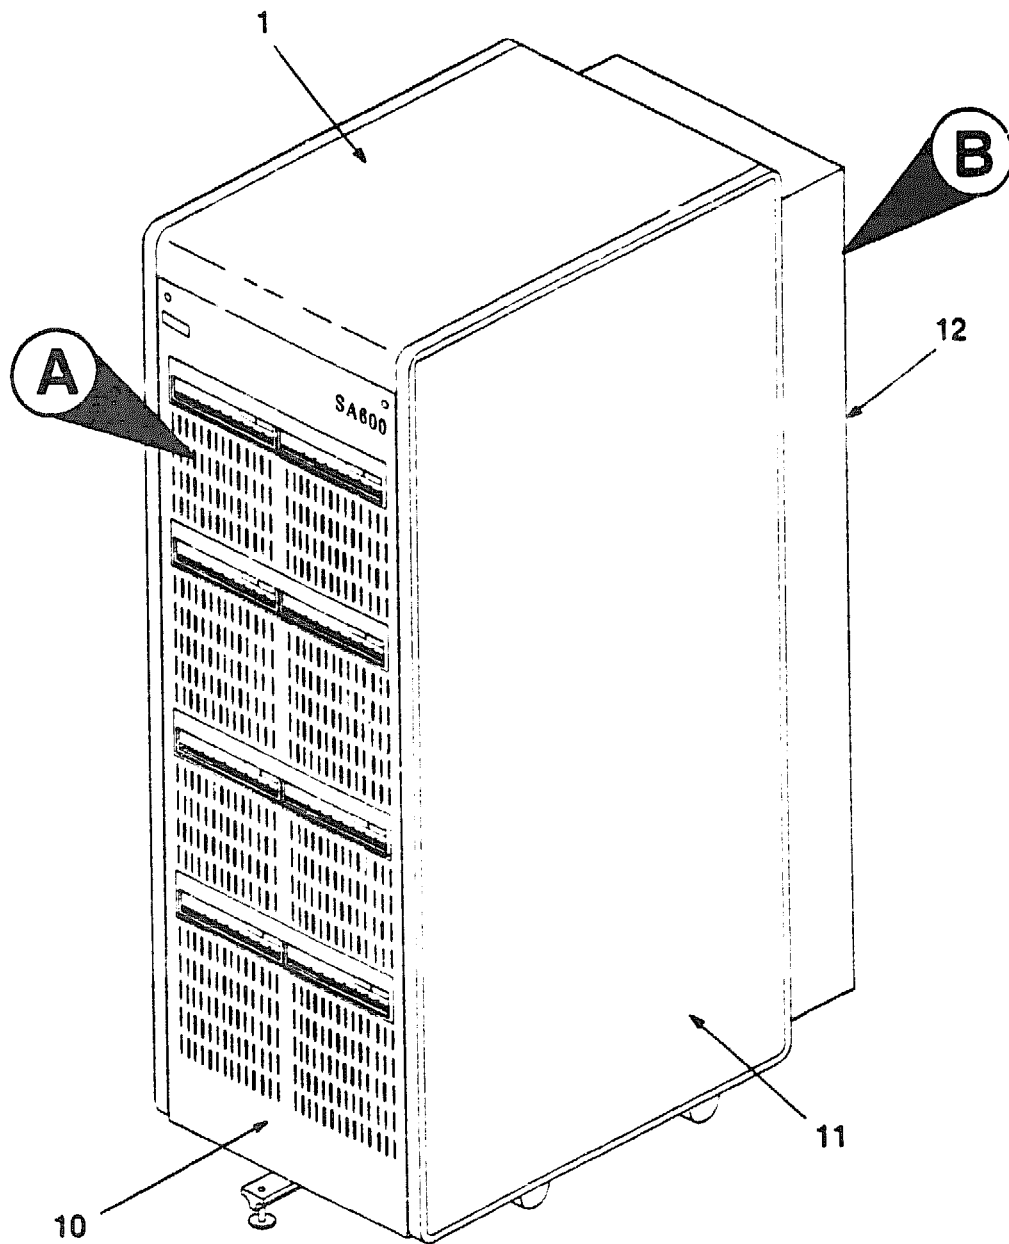

SA600-01-IL


Figure 1. SA600 Drive/Cabinet Assembly (Sheet 1 of 6)

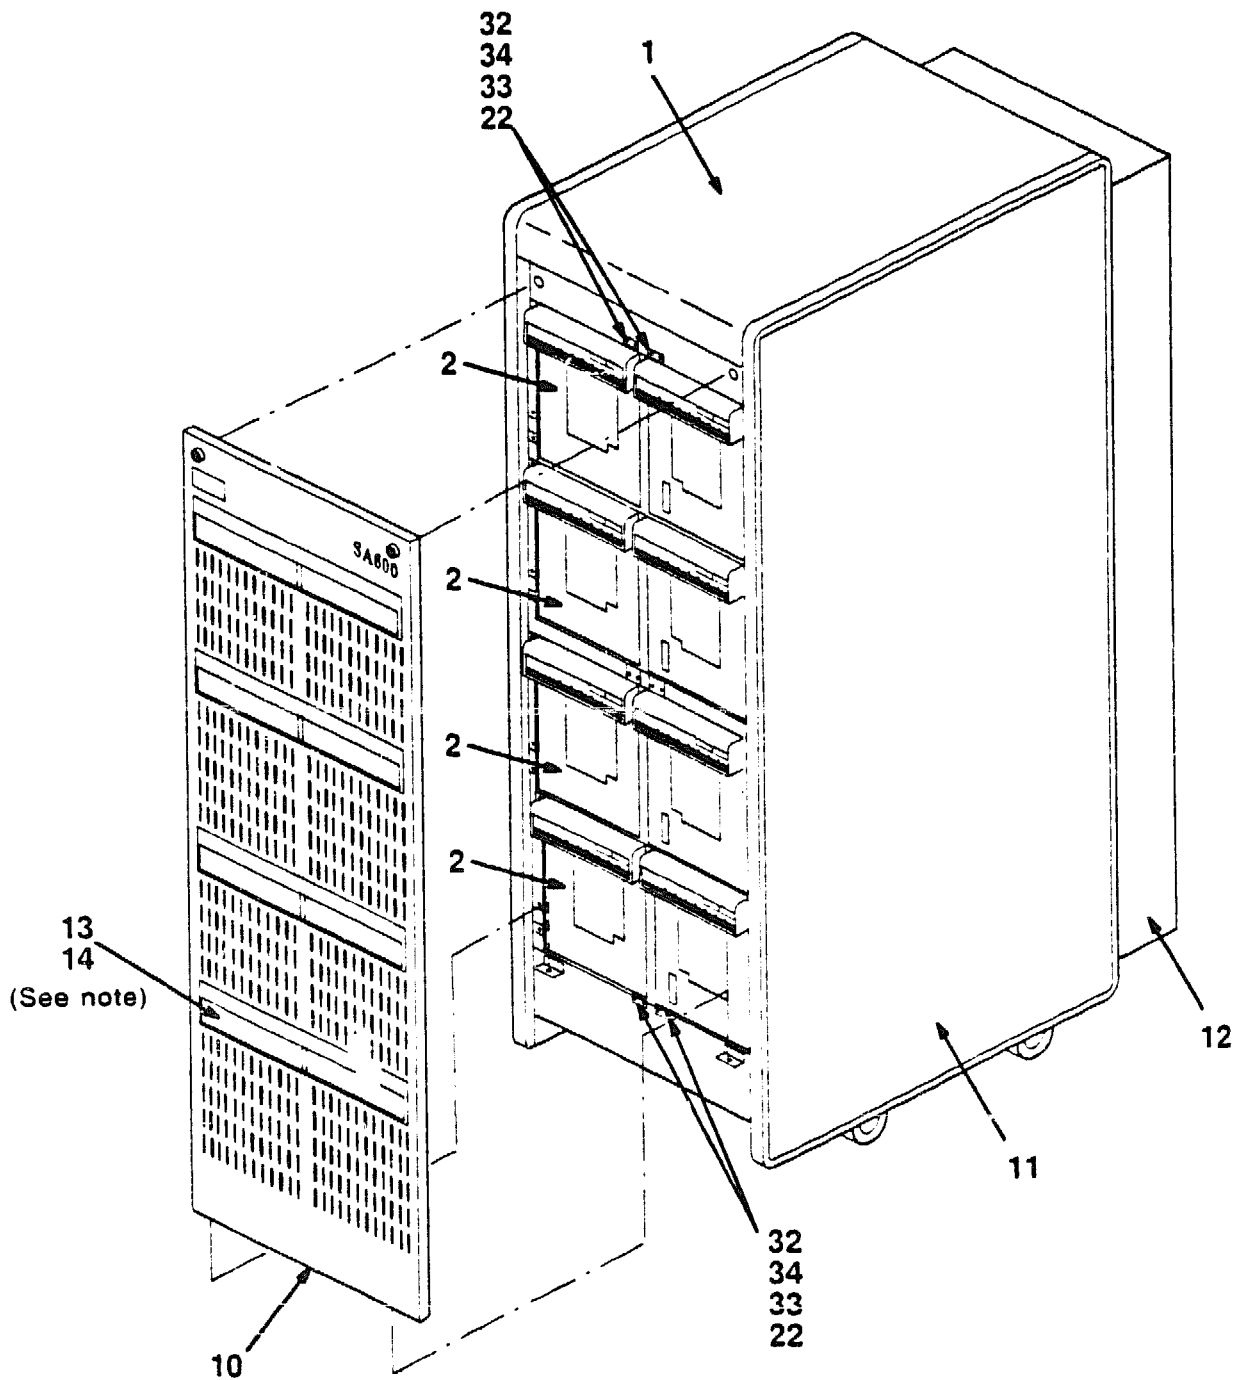

Note: Use items 13 and 14
in place of item 2.


SA600-01A-IL

Figure 1. SA600 Drive/Cabinet Assembly (Sheet 2 of 6)

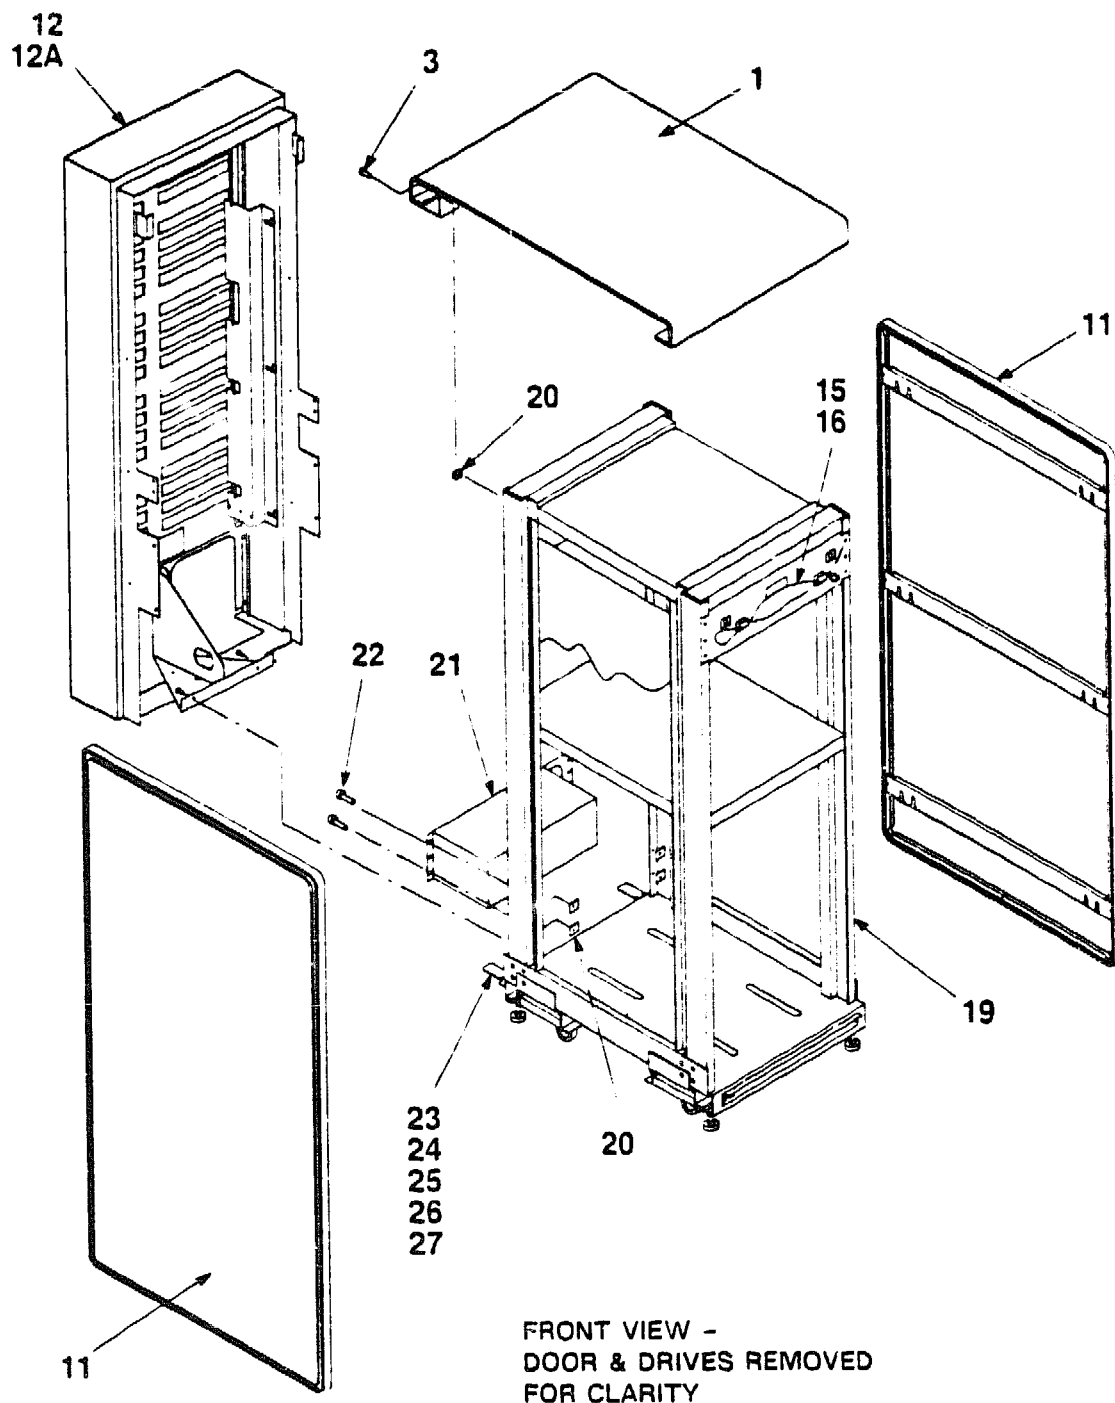


SA600-01B-1L

Figure 1. SA600 Drive/Cabinet Assembly (Sheet 3 of 6)

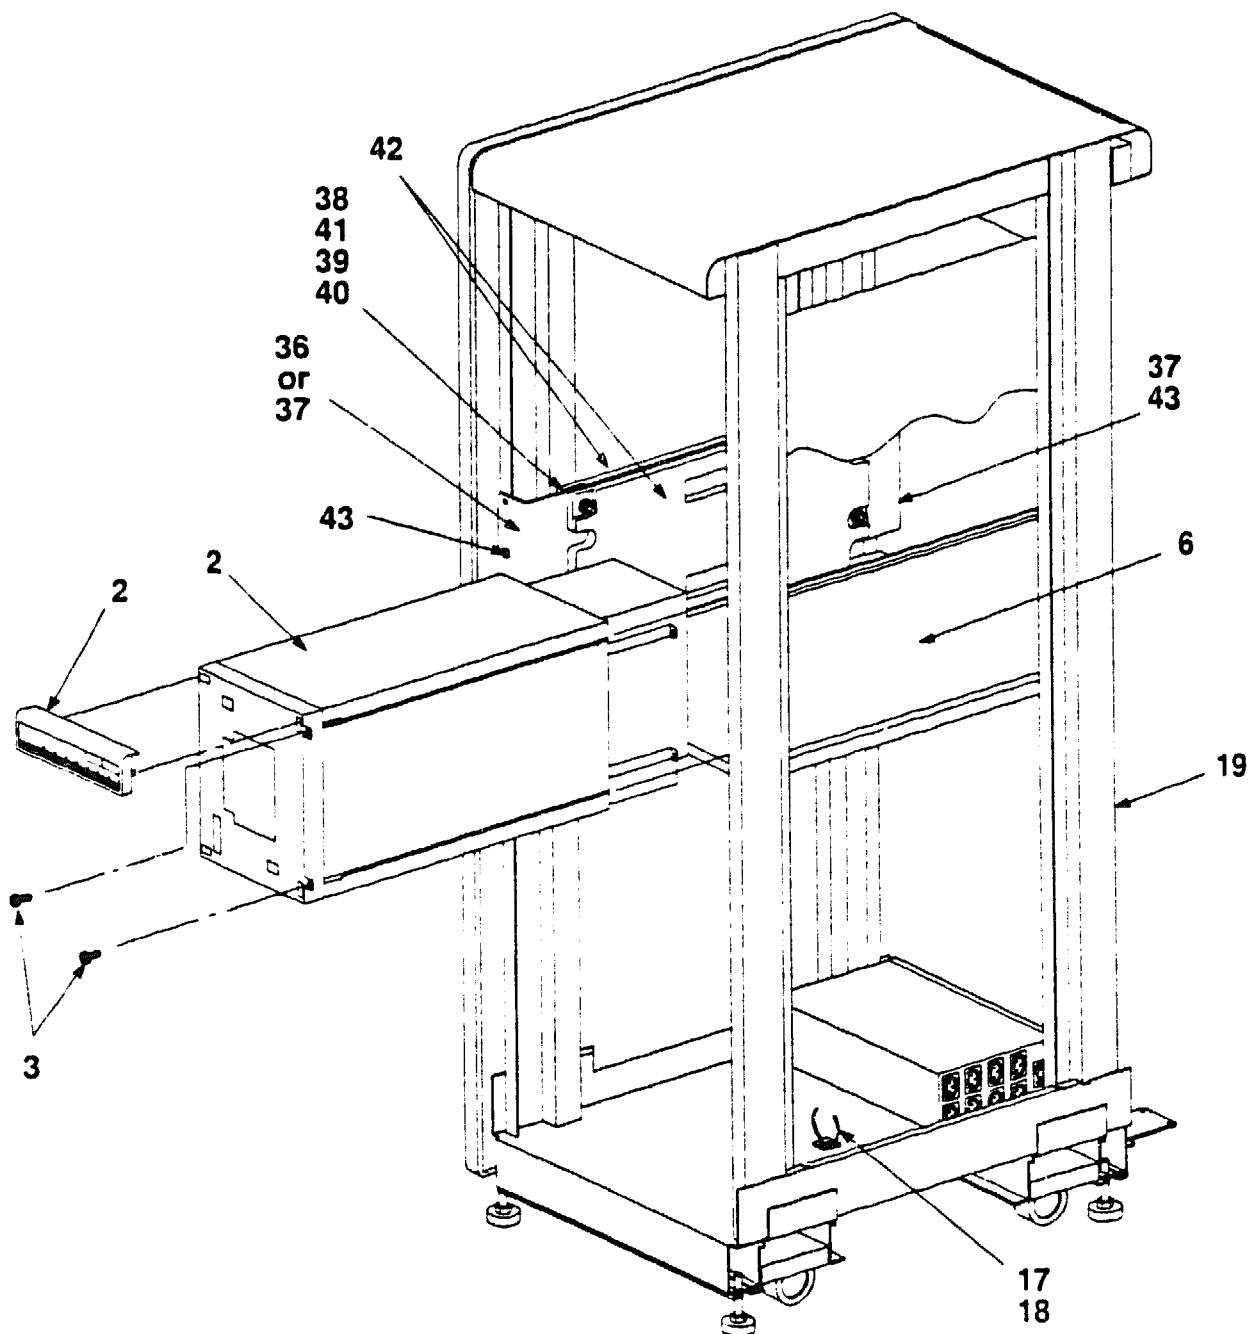

SA600-01C-IL


Figure 1. SA600 Drive/Cabinet Assembly (Sheet 4 of 6)

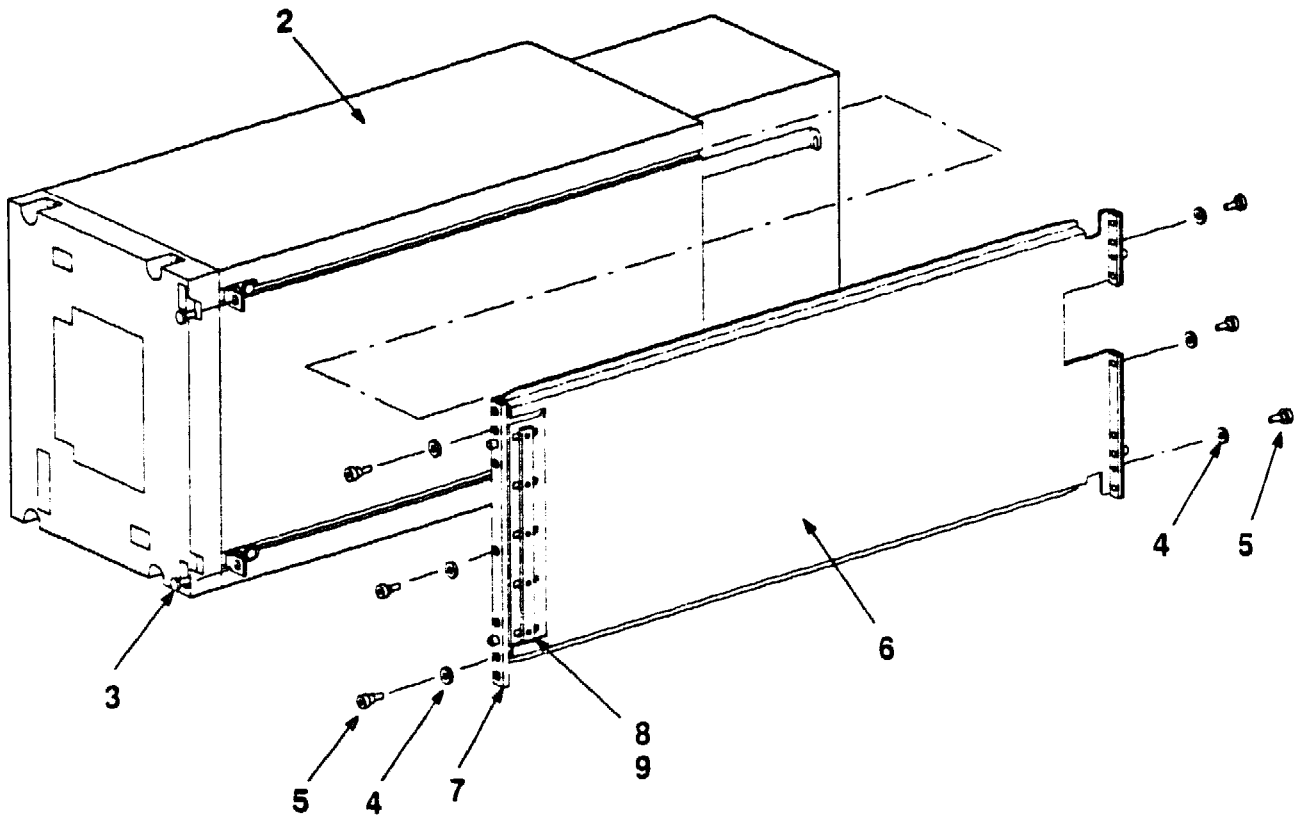

A

SA600-01D-IL

Figure 1. SA600 Drive/Cabinet Assembly (Sheet 5 of 6)

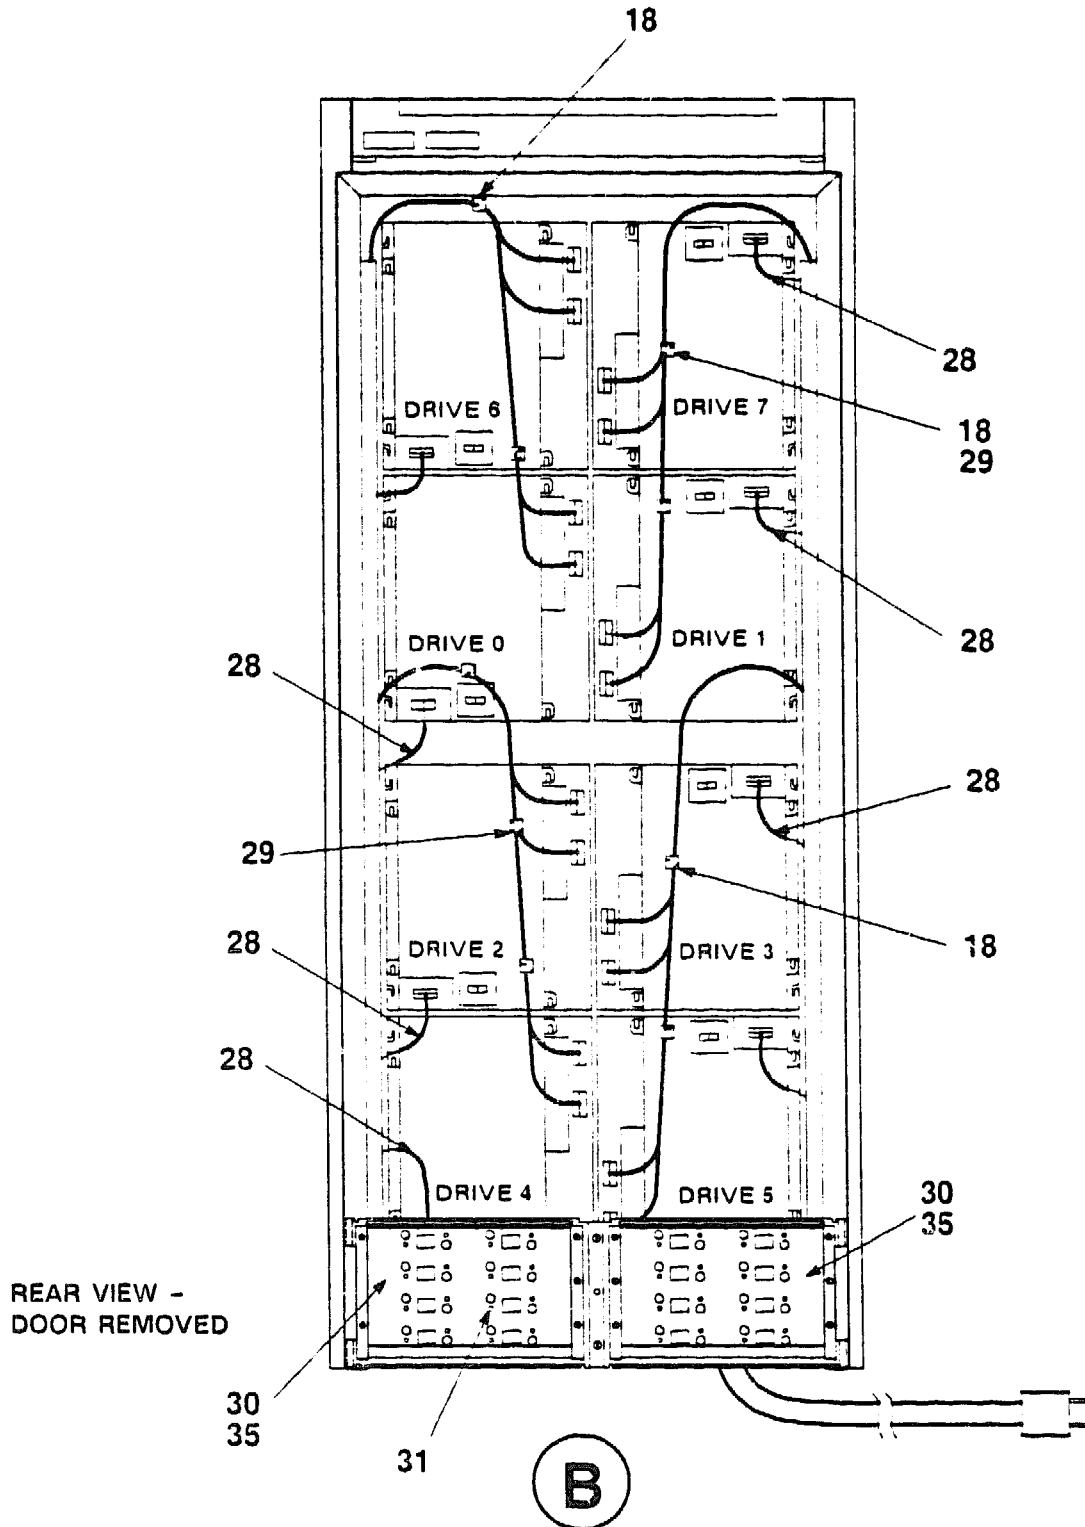


SA600-01E-IL

Figure 1. SA600 Drive Cabinet Assembly (Sheet 6 of 6)

FIG. & ITEM NO.	DESCRIPTION	E DEC PART NO.	ECO CUT-IN SA600-X 00002	USED ON CODE	REF FIG NO.
1-	SA600 DRIVE/CABINET ASSEMBLY				
	Code A - Used on SA600-CA (1-RA90 120V)	SA600-CA	00004	A	
	Code B - Used on SA600-CD (1-RA90 240V)	SA600-CD	00004	B	
	Code A - Used on SA600-FA (2-RA90 120V)	SA600-FA		C	
	Code D - Used on SA600-FD (2-RA90 240V)	SA600-FD		D	
	Code E - Used on SA600-HA (4-RA90 120V)	SA600-HA		E	
	Code F - Used on SA600-HD (4-RA90 120V)	SA600-HD		F	
	Code G - Used on SA600-JA (8-RA90 120V)	SA600-JA		G	
	Code H - Used on SA600-JD (8-RA90 240V)	SA600-JD		H	
1	*Cover, Single Width 60 Inch Cab Top	H9544-LB			
2	*RA90 Disk Drive Assembly (See Note)	70-23899-01			
3	*Screw, Self Tap Truss Hd No. 10-32 x 1/2	90-00063-39			
4	*Washer, Lock	90-06637-00			
5	*Screw, Shoulder Socket Hex Hd No. 1/4 x 3/16	12-24007-02			
6	*Rail Assembly, Chassis	70-25600-01			
7	*Bracket Assembly, Rail	70-25637-01			
8	*Bar, Insert Nut	74-36464-01			
9	*Screw, Phl Flat Hd No. 10-32 x 3/4	90-00039-02			
10	*Door Assembly, SA600	70-23920-01			
11	*Panel Assembly, 60 Inch w/o Ground Strap	70-16699-02			
12	*BUSTLE KIT ASSEMBLY (SA)	70-24444-03			2
12A	*Plate, Bottom Cover (deleted) (Not Shown)	74-37081-01	00003		
13	*Bezel, Control Panel Filler (Not Shown)	74-36858-01		A-F	
14	*Screw, Self Tap Phl Flat Hd No. 4-20 x 3/16	90-10411-01		A-F	
15	*Clamp, U-Clip Adhesive Backed Cable	90-09771-04			
16	*Cable Assembly, ESD Wrist Strap	12-24023-02			
17	*Mount, Adhesive Backed Cable Tie	90-08264-00			
18	*Tie, Cable	90-07032-00			
19	*Frame Assembly, 60 Inch	70-22965-03			
20	*Retainer, U-Nut No. 10-32	90-07786-00			
21	*Controller, Power 120V 3 Phase 9 Outlet	881-A		ACEG	
	*Controller, Power 220/240V 3 Phase 9 Outet	881-B		BDFH	
22	*Screw, Phl Flat Hd No. 10-32 7/16	90-00039-27			
23	*Weldment, Bustle Support/Locking	70-24891-01			
24	*Screw, Sems Slot Hex Hd No. 1/4-20 x 3/4	90-09988-14			
25	*Bar, End Panel Locking	74-36150-01			
26	*Nut, Wing No. 10-24	90-10848-01			
27	*Bolt, Round Hd 1/2 Inch Carriage	90-10849-01			
28	*Cord, Power 9' 15A (Drive to Power Controller)	17-00442-19			
29	*Cable Assembly, Shielded SI 93 Ohm 5-1/2 Ft. (Drive to I/O)	17-01482-01			
30	*Panel, I/O Recessed	74-36165-03			
	NOTE: See IPB Manual EK-0RA90-IP.				


FIG. & ITEM NO.	DESCRIPTION	^E DEC PART NO.	ECO CUT-IN SA600-X 00002	USED ON CODE	REF FIG NO.
1-					
31	*Screw, Sems Phi Pan Hd No. 6-32 x 3/8	90-09984-00			
32	*Bracket, Chassis Stabilizer	74-37241-01			
33	*Bracket, Lockdown	74-37242-01			
34	*Screw, Serrated Hex Hd No. 1/4-20 x 5/8	90-10893-01			
35	*Screw, Phi Mach Hd No. 10-32 x 5/16	90-06070-02			
36	*Weight, Front Bracket (added)	74-39245-01	00004	AB	
37	*Weight, Rear Bracket (added)	74-39245-02	00004	AB	
38	*Screw, Mach Hel Pln No. 1/4-20 x 2 (added)	90-06249-09	00004	AB	
39	*Washer, Helical Split (added)	90-07797-00	00004	AB	
40	*Washer, Flat (added)	90-07983-00	00004	AB	
41	*Nut, Kep (added)	90-08203-00	00004	AB	
42	*Plate, Stabilizer (added)	74-38167-01	00004	AB	
43	*Screw, Sems Phi Pan Hd No. 10-32 x 5/8 (added)	12-21368-02	00004	AB	
	LABELS (Not Shown)				
	*Label, "Serial/Power Made in USA"	36-17674-38			
	*Label, "Serial/Power Made in Germany"	36-17674-43			
	*Label, "FCC Class A Peripheral"	36-17880-03			
	*Label, "Caution Stability"	36-20554-01			
	*Label, "SA600 Drive Configuration"	36-29457-02			
	DOCUMENTATION (Not Shown)				
	*RA90 User Guide	EK-RA90-UG			
	*SA600 Configuration Guide	EK-SA600-CG			
	*881 Power Controller User Guide	EK-881PC-UG			

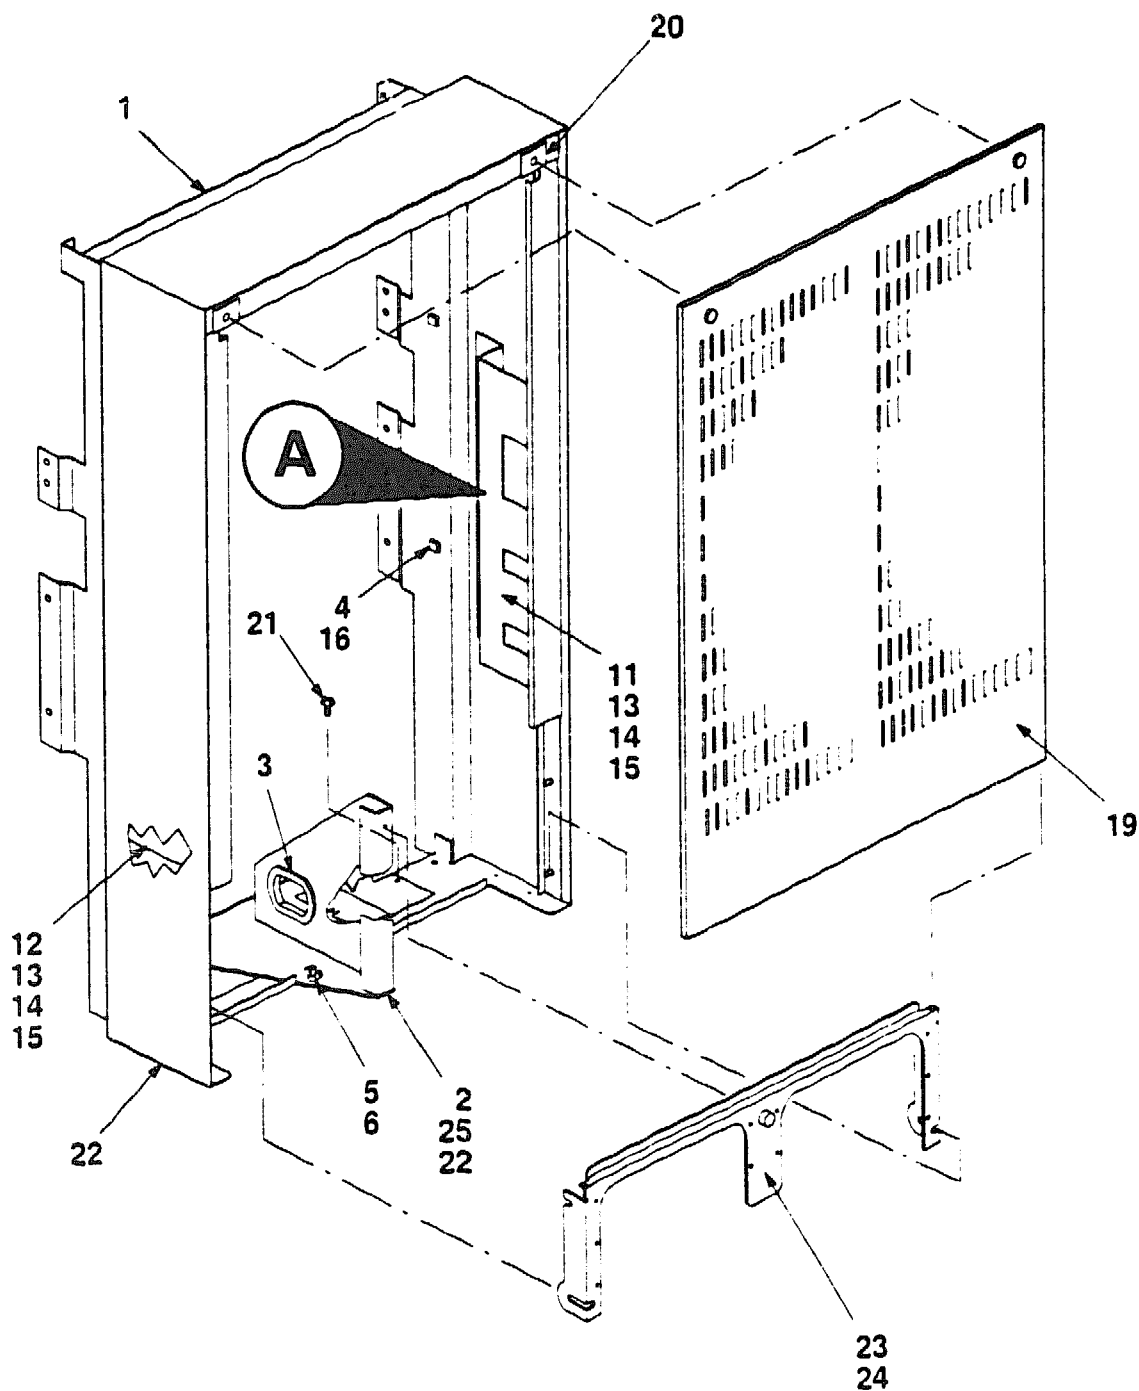

MODIFIED DESIGN

SA600-02-1L


Figure 2. Bustle Kit Assembly. (SA) (Sheet 1 of 3)

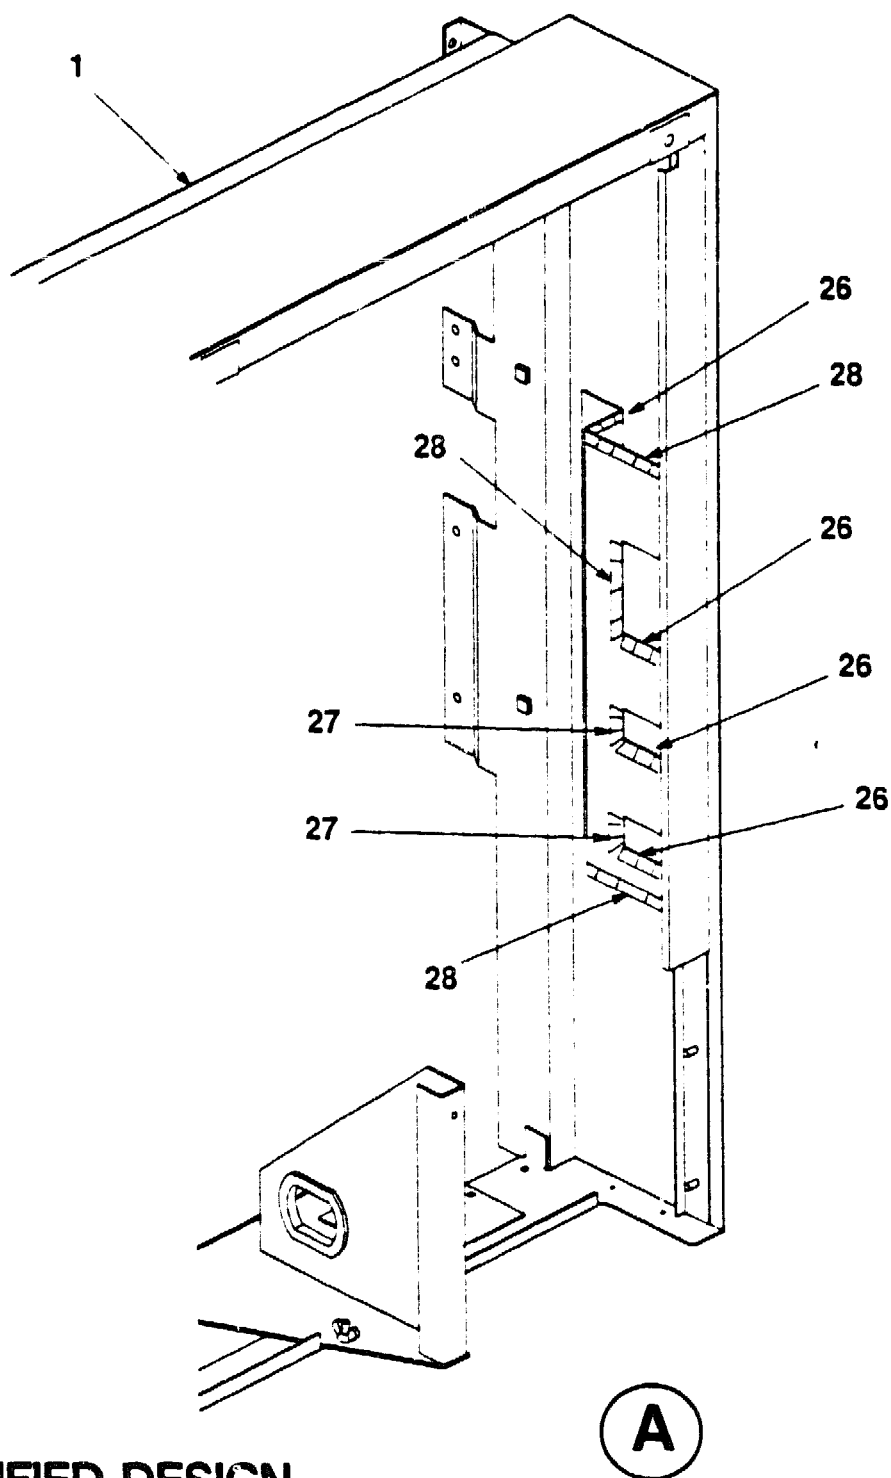

MODIFIED DESIGN

SA600-02A-1L

Figure 2. Bustle Kit Assembly, (SA) (Sheet 2 of 3)

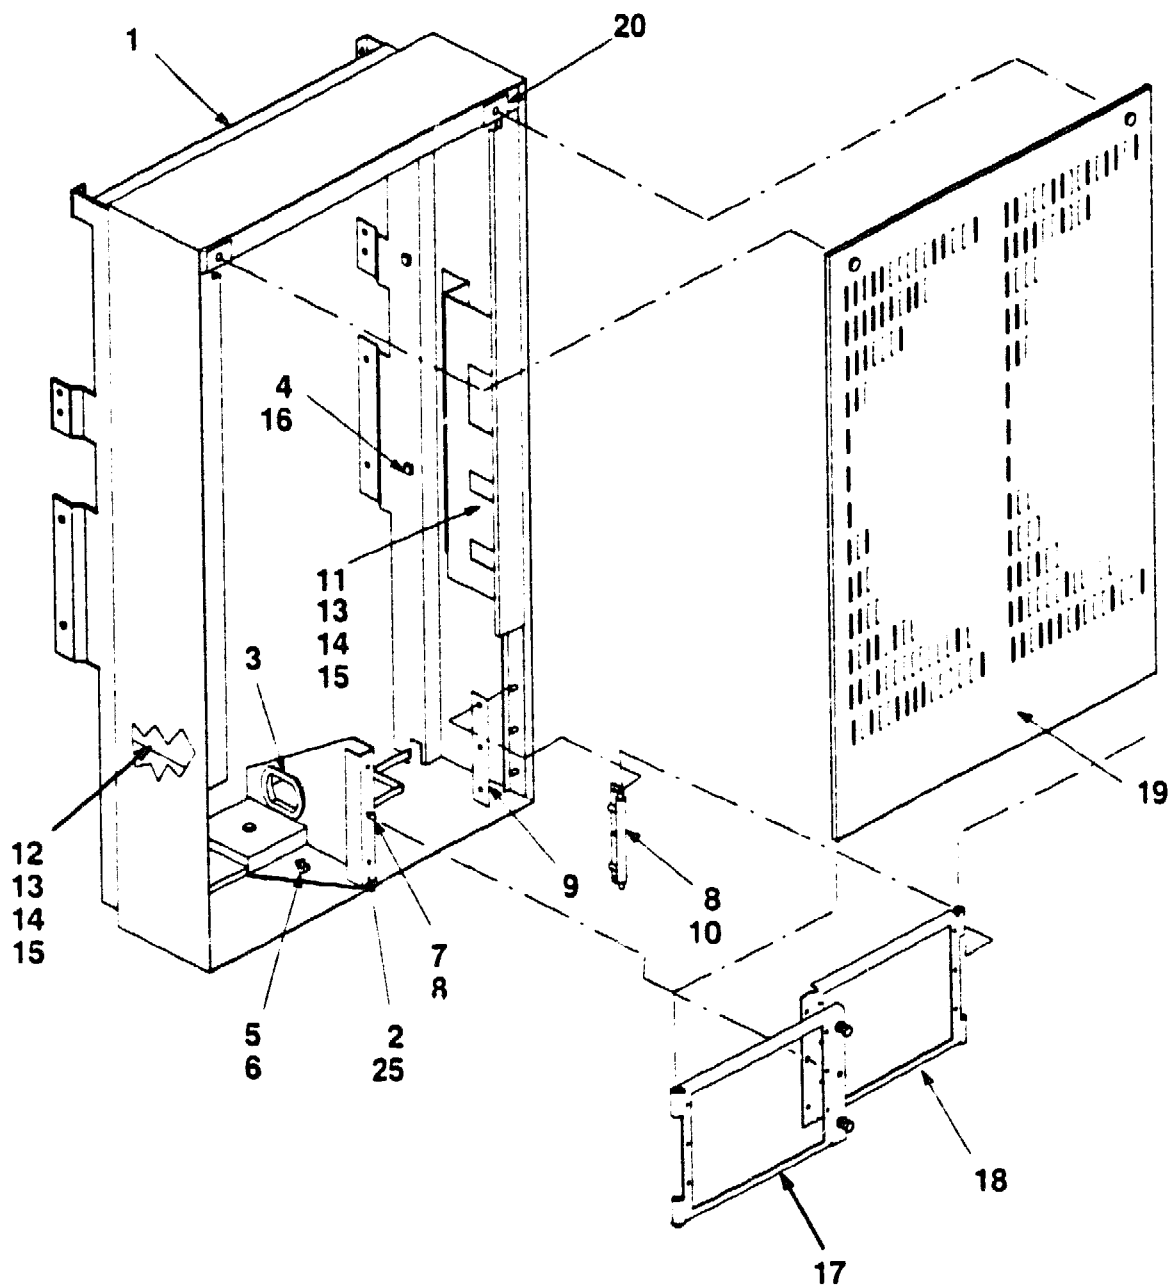


ORIGINAL DESIGN

SA600-02B-IL

Figure 2. Bustle Kit Assembly. (SA) (Sheet 3 of 3))

FIG. & ITEM NO.	DESCRIPTION	DEC PART NO.	F ECO CUT-IN 70-24444 00002	USED ON CODE	REF FIG NO.
2-	BUSTLE KIT ASSEMBLY. (SA)	70-24444-03			1
1	*Frame Assembly, Door (SA)	70-24431-03			
2	*Support, Center (3 Hi) (added) (replaces 70-24447-02)	70-25703-02	SA600-X 00003		
3	*Grommet, 1.8ID x 2.31 ID x .06	12-17944-00			
4	*Base, Cable Tie Mounting	90-10267-00			
5	*Nut, Wing No. 10-32 x .85 WD	90-06572-00			
6	*Washer, Helical Split	90-07906-00			
7	*Pin, Tapered Bullet	74-35450-01			
8	*Nut, Kep No. 10-32 x 3/8 (deleted)	90-06565-00			
9	*Plate, Spacer, 3 Hi (deleted)	74-34582-02			
10	*Hinge, I/O Door (deleted)	12-27614-02	SA600-X 00003		
11	*Trough, Right Hand Cable	74-35444-02			
12	*Trough, Left Hand Cable	74-35444-01			
13	*Screw, Mach Phi Pan Hd No. 6-32 x 1/4	90-06020-01			
14	*Washer, Flat	90-06664-00			
15	*Spring, Compression .300 OD x .75 LG	12-20113-08			
16	*Nut, Hex No. 10-32 x .363	90-07883-01			
17	*Door, Left I/O (deleted)	74-34583-02			
18	*Door, Right I/O (deleted)	74-34586-02	SA600-X 00003		
19	*PANEL ASSEMBLY, SA	70-24442-03			3
20	*Spring, Receptical 1.04WD x 1.5 LG	12-12972-02			
21	*Screw, Self Tap Truss Hd No. 10-32 x 1/2	90-00063-39			
22	*Retainer, U-Nut No. 10-32 (added) (replaces 90-07786-00)	90-07786-03	00004		
23	*Plate, Cover (See Note)	74-37244-01			
24	*Frame, I/O Panel	74-37950-01			
25	*Screw, Sems Phi Pan Hd No. 1-32 x 5/8	12-21368-02			
26	*Grommet, Strip (added)	90-09718-03	00004		
27	*Grommet, Strip (added)	90-09718-02	00004		
28	*Grommet, Strip (added)	90-09718-08	00004		
NOTE: Item 23 is secured to frame for shipping.					

FIG. & ITEM NO.	DESCRIPTION	DEC PART NO.	ECO CUT-IN 70-24444 00002	USED ON CODE	REF FIG NO.
3-	PANEL ASSEMBLY, SA	70-24442-03			2
1	*Panel Weldment, Sa	70-24895-03			
2	*Fastener, Turn Lock	12-12972-17			
3	*Spring, Retainer	12-12972-16			
4	*Screw, Slotted Guide Post No. 4-40	12-25003-01			
5	*Washer, Flat Nylon	90-00003-12			
6	*Nut, Hex No. 4-40	90-07992-00			
					Ω

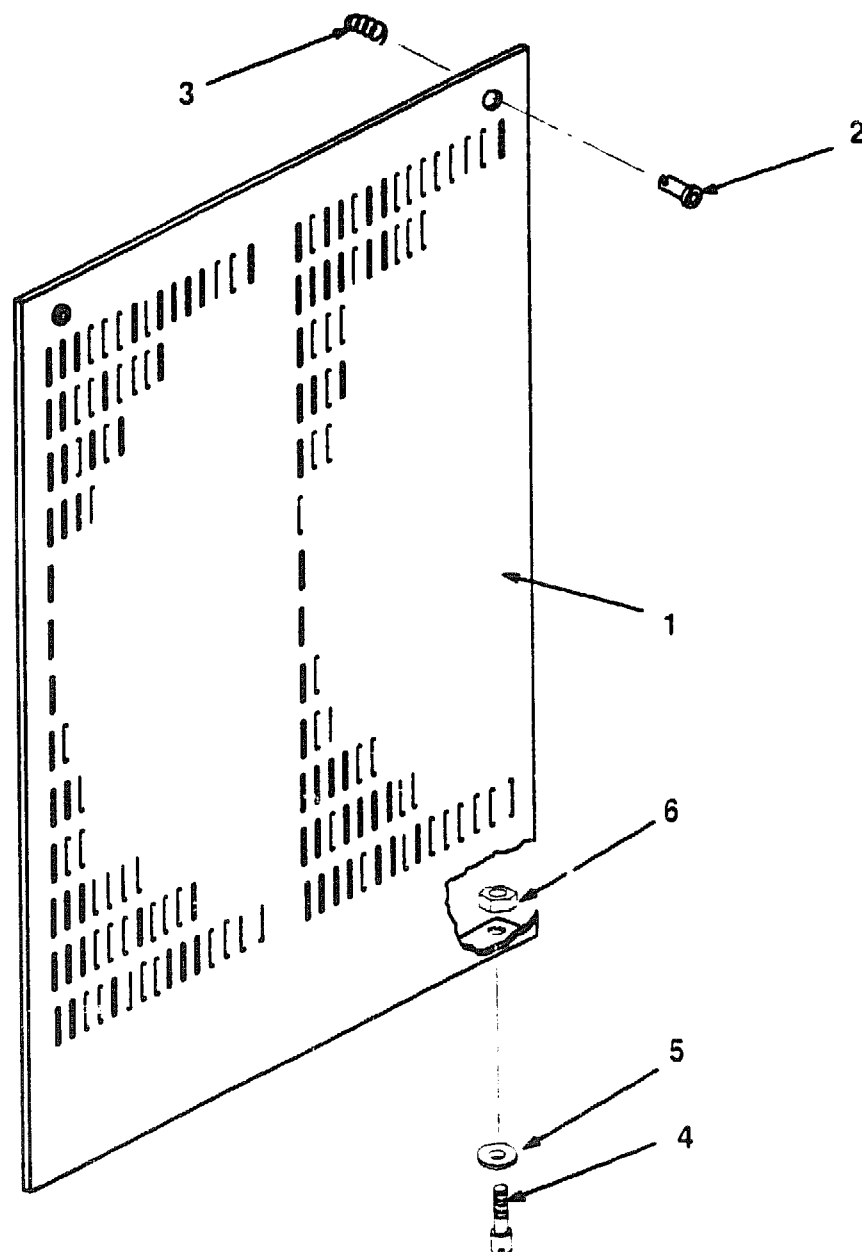

SA600-03-IL

Figure 3. Panel Assembly, SA

PART NUMBER/DESCRIPTION SORT



SA600 STORAGE ARRAY SORT BY DEC PART NUMBER

PART NO.	DESCRIPTION	FIG NO.	ITEM NO.
12-12972-02	Spring, Receptical 1.04 WD x 1.5 LG	2	20
12-12972-16	Spring, Retainer	3	3
12-12972-17	Fastener, Turn Lock Hex Recess	3	2
12-17944-00	Grommet, 1.8 ID x 2.31 ID x .06 Wd	2	3
12-20113-08	Spring, Compression .300C OD x .75 Lg	2	15
12-21368-02	Screw, Sems Phi Pan Hd No. 10-32 x 5/8	2	25
12-21368-02	Screw, Sems Phi Pan Hd No. 10-32 x 5/8 (added)	1	43
12-24007-02	Screw, Shoulder Socket Hex Hd No. 1/4 x 3/16	1	5
12-24023-02	Cable Assembly, ESD Wrist Strap	1	16
12-25003-01	Screw, Machine Flat Hd	3	4
12-27614-02	Hinge, I/O Door (deleted)	2	10
17-00442-19	Cord, Power 9' 15A (Drive to Power Controller)	1	28
17-01482-01	Cable Assembly, Shielded SI 93 OHM 5-1/2' (Drive to I/O)	1	29
36-17674-38	Label, "Serial/Power Made in USA"	1	Not Shown
36-17674-43	Label, "Serial/Power Made in Germany"	1	Not Shown
36-17880-03	Label, "FCC Class A Peripheral"	1	Not Shown
36-20554-01	Label, "Caution Stability"	1	Not Shown
36-29457-02	Label, "SA600 Drive Configuration"	1	Not Shown
70-16699-02	Panel Assembly, 60 Inch w/o Ground Strap	1	11
70-22965-04	Frame Assembly, 60 Inch	1	19
70-23899-01	RA90 Disk Drive Assembly	1	2
70-23920-01	Door Assembly, SA600	1	10
70-24431-03	Frame Assembly, Door (SA)	2	1
70-24442-03	PANEL ASSEMBLY, SA	2	19
70-24442-03	PANEL ASSEMBLY, SA	3	N/A
70-24444-03	BUSTLE KIT ASSEMBLY, (SA)	1	12
70-24444-03	BUSTLE KIT ASSEMBLY, (SA)	2	N/A
70-24891-01	Weldment, Bustle Support/Locking	1	23
70-24895-03	Panel Weldment, SA	3	1
70-25686-01	Rail Assembly, Chassis	1	6
70-25687-01	Bracket Assembly, Rail	1	7
70-25703-02	Support, Center (3 Hi) (added)	2	2
74-34582-02	Plate, Spacer, 3 Hi (deleted)	2	9
74-34583-02	Door, Left I/O (deleted)	2	17
74-34586-02	Door, Right I/O (deleted)	2	18
74-35444-01	Trough, Left Hand Cable	2	12
74-35444-02	Trough, Right Hand Cable	2	11
74-35450-01	Pin, Tapered Bullet	2	7
74-36150-01	Bar, End Panel Locking	1	25
74-36165-03	Panel, I/O Recessed	1	30
74-36464-01	Bar, Insert Nut	1	8
74-36858-01	Bezel, Control Panel Filler	1	13
74-37081-01	Plate, Bottom Cover (deleted) (Not Shown)	1	12A
74-37241-01	Bracket, Chassis Stabilizer	1	32

NOTE

When the description includes "added" or "deleted", ALWAYS refer to the figure parts list for the latest related part description.

SA600 STORAGE ARRAY SORT BY DEC PART NUMBER

PART NO.	DESCRIPTION	FIG NO.	ITEM NO.
74-37242-01	Bracket, Lockdown	1	33
74-37244-01	Plate, Cover (Not Shown)	2	23
74-37950-01	Frame, I/O Panel	2	24
74-38167-01	Plate, Stabilizer (added)	1	42
74-39245-01	Weight, Front Bracket (added)	1	36
74-39245-02	Weight, Rear Bracket	1	37
881-A	Controller, Power 120V 3 Phase 9 Outlet	1	21
881-B	Controller, Power 220V/240V 3 Phase 9 Outlet	1	21
90-00003-12	Washer, Flat Nylon	3	5
90-00039-02	Screw, Phi Flat Hd No. 10-32 x 3/4	1	9
90-00039-27	Screw, Phi Flat Hd No. 10-32 x 7/16	1	22
90-00063-39	Screw, Self Tap Truss Hd No. 10-32 x 1/2	1	3
90-00063-39	Screw, Self Tap Truss Hd No. 10-32 x 1/2	2	21
90-06020-01	Screw, Mach Phi Pan Hd No. 6-32 x 1/4	2	13
90-06070-02	Screw, Phi Mach Flat Hd No. 10-32 x 5/16	1	35
90-06249-09	Screw, Mach Hex Pln No. 1/4-20 x 2 (added)	1	38
90-06565-00	Nut, Kep No. 10-32 x 3/8 (deleted)	2	8
90-06572-00	Nut, Wing No. 10-32 x .85 Wd	2	5
90-06637-00	Washer, Lock	1	4
90-06664-00	Washer, Flat	2	14
90-07032-00	Tie, Cable	1	18
90-07786-00	Retainer, U-Nut No. 10-32	1	20
90-07786-03	Retainer, U-Nut No. 10-32 (added)	2	22
90-07797-00	Washer, Helical Split (added)	1	39
90-07883-01	Nut, Hex No. 10-32 x .368	2	16
90-07906-00	Washer, Helical Split	2	6
90-07983-00	Washer, Flat (added)	1	40
90-07992-00	Nut, Hex No. 4-40 x .246 Nylon	3	6
90-08203-00	Nut, Kep (added)	1	41
90-08264-00	Mount, Adhesive Backed Cable Tie	1	17
90-09718-03	Grommet, Strip (added)	2	26
90-09718-02	Grommet, Strip (added)	2	27
90-09718-08	Grommet, Strip (added)	2	28
90-09771-04	Clamp, U-Clip Adhesive Backed Cable	1	15
90-09984-00	Screw, Sems Phi Pan Hd No. 6-32 x 3/8	1	31
90-09988-14	Screw, Sems Slot Hex Hd No. 1/4-20 x 3/4	1	24
90-10267-00	Base, Cable Tie Mounting	2	4
90-10411-01	Screw, Self Tap Phi Flat Hd No. 4-20 x 3/16	1	14
90-10848-01	Nut, Wing No. 10-24	1	26
90-10849-01	Bolt, Round Hd 1/2 Inch Carriage	1	27
90-10893-01	Screw, Serrated Hex Hd No. 1/4-20 x 5/8	1	34
EK-SA600-CG	SA600 Configuration Guide	1	Not Shown
EK-RA90-UG	RA90 User Guide	1	Not Shown
EK-881PC-UG	881 Power Controller User Guide	1	Not Shown
H9544-LB	Cover, Single Width 60 Inch Cab Top	1	1

NOTE

When the description includes "added" or "deleted", ALWAYS refer to the figure parts list for the latest related part description.

SA600 STORAGE ARRAY SORT BY DEC PART NUMBER

PART NO.	DESCRIPTION	FIG NO.	ITEM NO.
SA600-CA	SA600-CA (1-RA90 120V)	1	N/A
SA600-CD	SA600-CD (1-RA90 240V)	1	N/A
SA600-FA	SA600-FA (2-RA90 120V)	1	N/A
SA600-FD	SA600-FD (2-RA90 240V)	1	N/A
SA600-HA	SA600-HA (4-RA90 120V)	1	N/A
SA600-HD	SA600-HD (4-RA90 240V)	1	N/A
SA600-JA	SA600-JA (8-RA90 120V)	1	N/A
SA600-JD	SA600-JD (8-RA90 240V)	1	N/A

NOTE

When the description includes "added" or "deleted", ALWAYS refer to the figure parts list for the latest related part description.

SA600 STORAGE ARRAY SORT BY DEC PART DESCRIPTION

DESCRIPTION	DEC PART NO.	FIG. NO.	ITEM NO.
Bar, End Panel Locking	74-36150-01	1	25
Bar, Insert Nut	74-36464-01	1	8
Base, Cable Tie Mounting	90-10267-00	2	4
Bezel, Control Panel Filler	74-36858-01	1	13
Bolt, Round Hd 1/2 Inch Carriage	90-10849-01	1	27
Bracket Assembly, Rail	70-25687-01	1	7
Bracket, Chassis Stabilizer	74-37241-01	1	32
Bracket, Lockdown	74-37242-01	1	33
BUSTLE KIT ASSEMBLY, (SA)	70-24444-03	1	12
BUSTLE KIT ASSEMBLY, (SA)	70-24444-03	2	N/A
Cable Assembly, ESD Wrist Strap	12-24023-02	1	16
Cable Assembly, Shielded SI 93 OHM 5-1/2' (Drive to I/O)	17-01482-01	1	29
Clamp, U-Clip Adhesive Backed Cable	90-09771-04	1	15
Controller, Power 120V 3 Phase 9 Outlet	881-A	1	21
Controller, Power 220V/240V 3 Phase 9 Outlet	881-B	1	21
Cord, Power 9' 15A (Drive to Power Controller)	17-00442-19	1	28
Cover, Single Width 60 Inch Cab Top	H9544-LB	1	1
Door Assembly, SA600	70-23920-01	1	10
Door, Left I/O (deleted)	74-34583-02	2	17
Door, Right I/O (deleted)	74-34586-02	2	18
Fastener, Turn Lock Hex Recess	12-12972-17	3	2
Frame Assembly, Door (SA)	70-24431-03	2	1
Frame Assembly, 60 Inch	70-22965-04	1	19
Frame, I/O Panel	74-37950-01	2	24
Grommet, Strip (added)	90-09718-03	2	26
Grommet, Strip (added)	90-09718-02	2	27
Grommet, Strip (added)	90-09718-08	2	28
Grommet, 1.8 ID x 2.31 ID x .06 Wd	12-17944-00	2	3
Hinge, I/O Door (deleted)	12-27614-02	2	10
Label, "Caution Stability"	36-20554-01	1	Not Shown
Label, "FCC Class A Peripheral"	36-17880-03	1	Not Shown
Label, "SA600 Drive Configuration"	36-29457-02	1	Not Shown
Label, "Serial/Power Made in USA"	36-17674-38	1	Not Shown
Label, "Serial/Power Made in Germany"	36-17674-43	1	Not Shown
Mount, Adhesive Backed Cable Tie	90-08264-00	1	17
Nut, Hex No. 10-32 x .368	90-07883-01	2	16
Nut, Hex No. 4-40 x .246 Nylon	90-07992-00	3	6
Nut, Kep (added)	90-08203-00	1	41
Nut, Kep No. 10-32 x 3/8 (deleted)	90-06565-00	2	8
Nut, Wing No. 10-24	90-10848-01	1	26
Nut, Wing No. 10-32 x .85 Wd	90-06572-00	2	5

NOTE

When the description includes "added" or "deleted", ALWAYS refer to the figure parts list for the latest related part description.

SA600 STORAGE ARRAY SORT BY DEC PART DESCRIPTION

DESCRIPTION	DEC PART NO.	FIG. NO.	ITEM NO.
PANEL ASSEMBLY, SA	70-24442-03	2	19
PANEL ASSEMBLY, SA	70-24442-03	3	N/A
Panel Assembly, 60 Inch w/o Ground Strap	70-16699-02	1	11
Panel, I/O Recessed	74-36165-03	1	30
Panel Weldment, SA	70-24895-03	3	1
Pin, Tapered Bullet	74-35450-01	2	7
Plate, Bottom Cover (deleted) (Not Shown)	74-37081-01	1	12A
Plate, Cover (Not Shown)	74-37244-01	2	23
Plate, Spacer, 3 Hi (deleted)	74-34582-02	2	9
Plate, Stabilizer (added)	74-38167-01	1	42
RA90 Disk Drive Assembly	70-23899-01	1	2
RA90 User Guide	EK-RA90-UG	1	Not Shown
Rail Assembly, Chassis	70-25686-01	1	6
Retainer, U-Nut No. 10-32	90-07786-00	1	20
Retainer, U-Nut No. 10-32 (added)	90-07786-03	2	22
SA600 Configuration Guide	EK-SA600-CG	1	Not Shown
SA600-CA (1-RA90 120V)	SA600-CA	1	N/A
SA600-CD (1-RA90 240V)	SA600-CD	1	N/A
SA600-FA (2-RA90 120V)	SA600-FA	1	N/A
SA600-FD (2-RA90 240V)	SA600-FD	1	N/A
SA600-HA (4-RA90 120V)	SA600-HA	1	N/A
SA600-HD (4-RA90 240V)	SA600-HD	1	N/A
SA600-JA (8-RA90 120V)	SA600-JA	1	N/A
SA600-JD (8-RA90 240V)	SA600-JD	1	N/A
Screw, Machine Flat Hd	12-25003-01	3	4
Screw, Mach Hex Pln No. 1/4-20 x 2 (added)	90-06249-09	1	38
Screw, Mach Phi Pan Hd No. 6-32 x 1/4	90-06020-01	2	13
Screw, Phi Flat Hd No. 10-32 x 7/16	90-00039-27	1	22
Screw, Phi Flat Hd No. 10-32 x 3/4	90-00039-02	1	9
Screw, Phi Mach Flat Hd No. 10-32 x 5/16	90-06070-02	1	35
Screw, Self Tap Phi Flat Hd No. 4-20 x 3/16	90-10411-01	1	14
Screw, Self Tap Truss Hd No. 10-32 x 1/2	90-00063-39	1	3
Screw, Self Tap Truss Hd No. 10-32 x 1/2	90-00063-39	2	21
Screw, Sems Phi Pan Hd No. 10-32 x 5/8 (added)	12-21368-02	1	43
Screw, Sems Phi Pan Hd No. 6-32 x 3/8	90-09984-00	1	31
Screw, Sems Phi Pan Hd No. 10-32 x 5/8	12-21368-02	2	25
Screw, Sems Slot Hex Hd No. 1/4-20 x 3/4	90-09988-14	1	24
Screw, Serrated Hex Hd No. 1/4-20 x 5/8	90-10893-01	1	34
Screw, Shoulder Socket Hex Hd No. 1/4 x 3/16	12-24007-02	1	5
Spring, Compression .3000 OD x .75 Lg	12-20113-08	2	15
Spring, Receptical 1.04 WD x 1.5 LG	12-12972-02	2	20
Spring, Retainer	12-12972-16	3	3
Support, Center (3 Hi) (added)	70-25703-02	2	2

NOTE

When the description includes "added" or "deleted", ALWAYS refer to the figure parts list for the latest related part description.

SA600 STORAGE ARRAY SORT BY DEC PART DESCRIPTION

DESCRIPTION	DEC PART NO.	FIG. NO.	ITEM NO.
Tie, Cable	90-07032-00	1	18
Trough, Left Hand Cable	74-35444-01	2	12
Trough, Right Hand Cable	74-35444-02	2	11
Washer, Flat (added)	90-07983-00	1	40
Washer, Flat	90-06664-00	2	14
Washer, Flat Nylon	90-00003-12	3	5
Washer, Helical Split (added)	90-07797-00	1	39
Washer, Helical Split	90-07906-00	2	6
Washer, Lock	90-06637-00	1	4
Weldment, Bustle Support/Locking	70-24891-01	1	23
Weight, Front Bracket (added)	74-39245-01	1	36
Weight, Rear Bracket	74-39245-02	1	37
881 Power Controller User Guide	EK-881PC-UG	1	Not Shown

NOTE

When the description includes, "added" or "deleted", ALWAYS refer to the figure parts list for the latest related part description.