

Accessing Sun Documentation Online

A broad selection of Sun system documentation is located at the following web site:

<http://www.sun.com/products-n-solutions/hardware/docs>

To locate the most current documentation at this site, select a product category. The documents at that location may include updated information that did not ship with your product, such as product notes, release notes, late-breaking news, or later revisions of manuals.

A complete set of Solaris documentation and many other titles are located at:

<http://docs.sun.com>

Ordering Sun Documentation

Fatbrain.com, an Internet professional bookstore, stocks select product documentation from Sun Microsystems, Inc. For a list of documents and how to order them, visit the Sun Documentation Center on Fatbrain.com at:

<http://www.fatbrain.com/documentation/sun>

Sun Welcomes Your Comments

Sun is interested in improving its documentation and welcomes your comments and suggestions. You can email your comments to Sun at:

docfeedback@sun.com

Please include the part number (806-4714-11) of the document in the subject line of your email.

Copyright 2001 Sun Microsystems, Inc. All rights reserved. Use is subject to license terms. Third-party software, including font technology, is copyrighted and licensed from Sun suppliers. Sun, Sun Microsystems, the Sun logo, AnswerBook2, docs.sun.com, Sun Fire, and Solaris are trademarks, registered trademarks, or service marks of Sun Microsystems, Inc. in the U.S. and other countries. Federal Acquisitions: Commercial Software—Government Users Subject to Standard License Terms and Conditions.


Copyright 2001 Sun Microsystems, Inc. Tous droits réservés. Distribué par des licences qui en restreignent l'utilisation. Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun. Sun, Sun Microsystems, le logo Sun, AnswerBook2, docs.sun.com, Sun Fire, et Solaris sont des marques de fabrique ou des marques déposées, ou marques de service, de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

Sun Fire™ 4800 System Fan Tray Installation Guide



Sun Fire 4800 System Fan Tray

The Sun Fire™ 4800 system has three fan trays that collectively cool the system. The fan tray locations in the system are labeled FT0, FT1, and FT2, and FT0 is the redundant fan tray location.

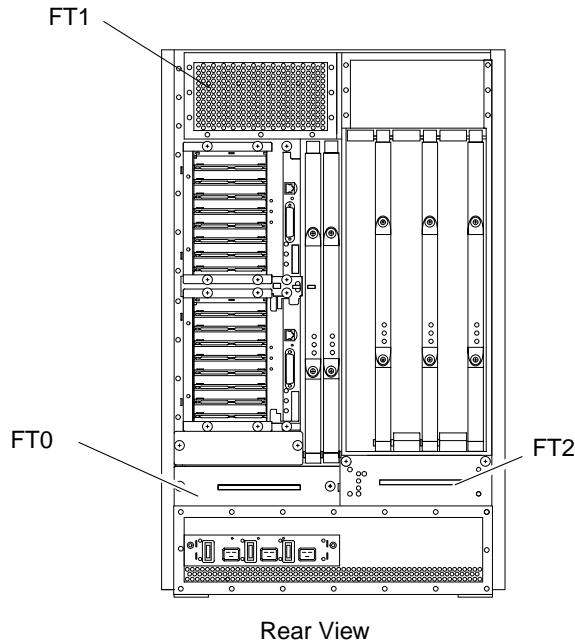

Removing a Fan Tray From a Powered-On System



Caution – Within one minute of removing the fan tray, install a filler panel or fan tray to prevent the system from overheating.

1. **Make sure you have a replacement fan tray or filler panel available.**
2. **Power off the fan tray to be removed.**
Refer to the *Sun Fire 6800/4810/4800/3800 Systems Platform Administration Manual* for complete procedures for powering off the fan tray. You **DO NOT** have to power off the AC input box, or RTS module(s).

Note – When the green Activated LED (Ⓛ) on the fan tray is off (not lit) and the amber OK to remove LED (Ⓚ) is on (lit), it is safe to continue.

3. **Loosen the captive screws from the fan tray.**
4. **Remove the fan tray.**
5. **Install a filler panel and tighten the captive screws.**

Installing a Fan Tray in a Powered-On System



Caution – Within one minute of removing the filler panel, install a fan tray to prevent the system from overheating.

1. **Loosen the captive screws of the filler panel and remove the filler panel and save it.**
2. **Slide the fan tray into the slot.**
3. **Tighten the captive screws.**
4. **Power on the fan tray.**
Refer to the *Sun Fire 6800/4810/4800/3800 Systems Platform Administration Manual* for complete procedures for powering on the fan tray.